

8.7 LBS. PER GAL. @ 68°F

972 GRAMS PER LITER @ 20°C


**PRODUCT INFORMATION**

**GENERAL INFORMATION**

**HUMIPLUS** Fertilizer Activator is composed of a long chain of organic carboxyl and polyhydroxide acids.

This organic complex molecule is very active with many open rings giving it a very large capacity to hold and exchange nutritive cations and anions.

The effectiveness of this type of organic additive to fertilizer will (1) enhance cell wall permeability thru the root and leaf system. (2) Greatly increase the effectiveness of cation transfer in the soil by increasing negatively charged colloidal particles capable of holding and exchanging cations.

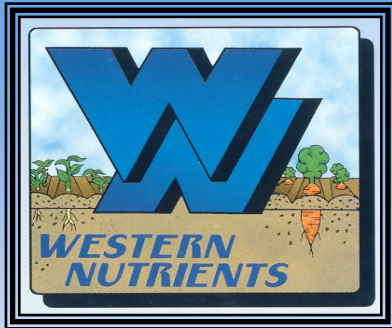

# HUMIPLUS® FERTILIZER ACTIVATOR

**ACTIVE INGREDIENTS**

Carboxyl and Polyhydroxyl Acids ..... 10%

**KEEP OUT OF REACH OF CHILDREN**

WARRANTY: Western Nutrients Corp. makes no warranty, express or implied, including the warranties of merchantability and/or fitness for any particular purpose, concerning this material, except those which are contained on the Western Nutrients Corp. label attached to the product container.

MANUFACTURED BY

**WESTERN NUTRIENTS CORPORATION**

245 Industrial Street, Bakersfield, CA 93307  
(661) 327-9604 / Fax (661) 327-1740  
(800) 542-6664 CA Only

E-mail: [westernnutrients@lightspeed.net](mailto:westernnutrients@lightspeed.net)

Website: <http://www.westernnutrientscorp.com>

HUMIPLUS is a Registered Trademark of Western Nutrients Corporation

**NET CONTENTS 5 GALLONS  
18.925 Liters**

**Directions**

**CROPS**

**HUMIPLUS** Fertilizer Activator can be applied to most vegetable crops, deciduous fruit, and nut trees, citrus, avocados, grapes, melons, ornamentals, turf, pasture, range, grasses, and most other crops.

**PREPLANT**

Apply 1 - 3 quarts to each 30 gallons of liquid fertilizer.

**SIDE DRESS**

Apply 1 - 3 quarts to each 30 gallons of liquid fertilizer.

**IRRIGATION WATER BROADCAST SPRAY**

Apply 1 - 3 quarts to each 30 gallons of liquid fertilizer.

"Information regarding the contents and levels of metals in this product is available by calling 1-800-542-6664".